


# Strickland Mfg Concrete Crusher Install Instructions

THE FOLLOWING PROCEDURE SHOULD BE FOLLOWED FOR INSTALLING THE CRUSHER TO ENSURE PROPER GENERAL PURPOSE USAGE CAN BE OBTAINED. USERS WITH SPECIAL APPLICATIONS MAY, IF THEY WISH INSTALL THE CRUSHER DIFFERENTLY, PROVIDED IT IS NOT DETRIMENTAL TO THE SAFE APPLICATION OF THE CRUSHER OR THE EXCAVATOR.

- ① MOUNT CRUSHER TO MACHINE USING STANDARD PIN-ON PROCEDURE
- ② CURL OR TUCK DIPPER ARM UNDER BOOM AS SHOWN IN FIG.1 AND USE BUCKET CURL CYLINDER TO CLOSE AND ROTATE CRUSHER FULLY.
- ③ WITH STAY ARM FITTED IN BACK HOLE OF THE DIPPER BRACKET MOVE THE DIPPER BRACKET 25MM TO 30MM ALONG THE DIPPER ARM, SO PUSHING CRUSHER ARM AWAY FROM DIPPER PLATE BY APPROX 25MM. THIS WILL ENSURE ADEQUATE CLEARANCE BETWEEN FIXED JAW TOP AND DIPPER.

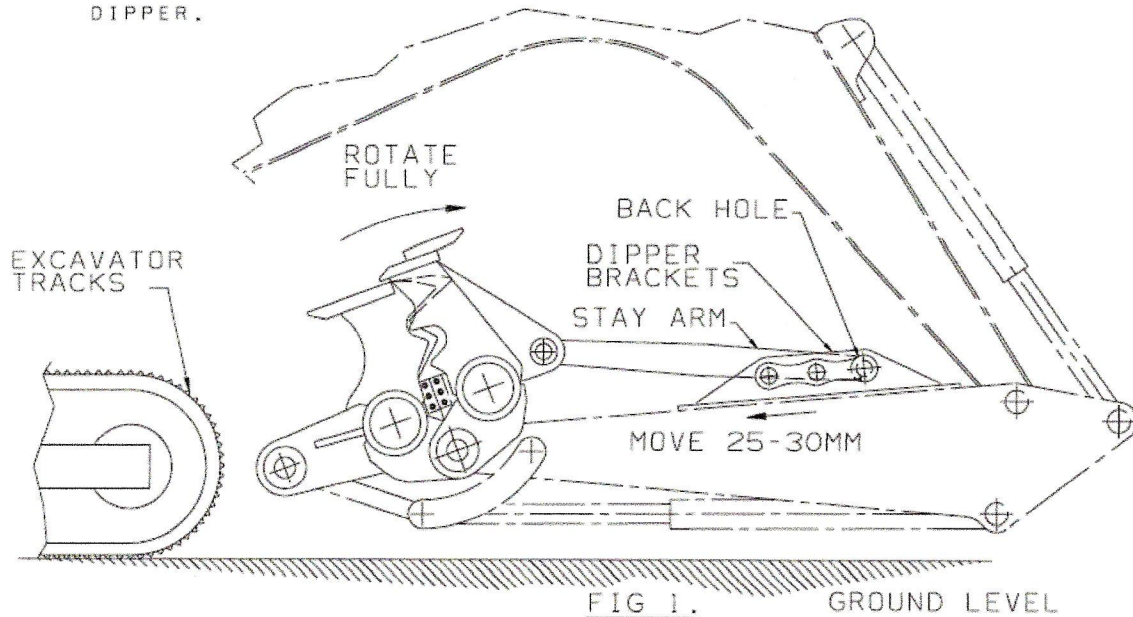

- ④ WELD DIPPER BRACKET UNIT TO DIPPER AS OUTLINED IN FIG.2  
INTERMITTENTLY WELD STAY ARM BRACKET TO DIPPER ARM  
USING E7018 ELECTRODE OR APPROVED EQUIVALENT.

